



5 Voorbaai Crescent, Bayview, Hartenbos
Tel. : (044) 695 0831

P.O. Box 35, Hartenbos, 6520
e-mail : jaco@testpro.co.za



Client:	Zec 4 (Pty) Ltd
	P.O Box 154
	Hartenbos
	6520
Attention:	Dreyer van Zyl, 0825716279

SOIL ANALYSIS TEST REPORT

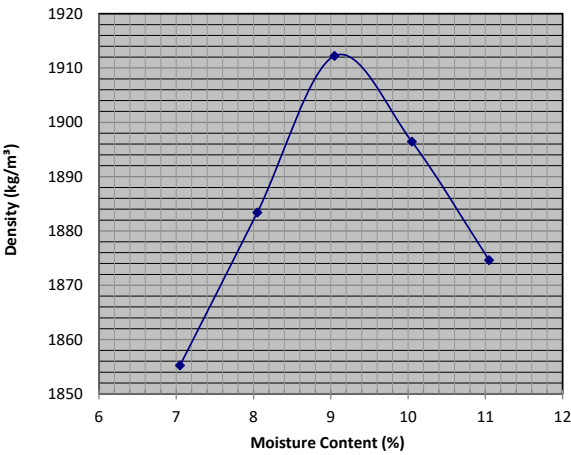
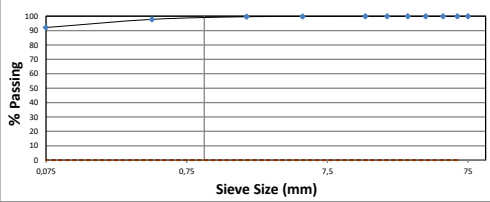
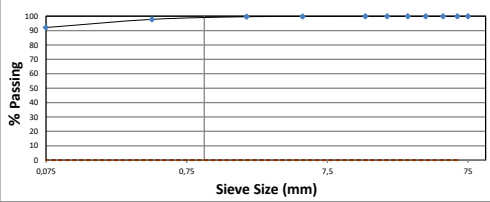
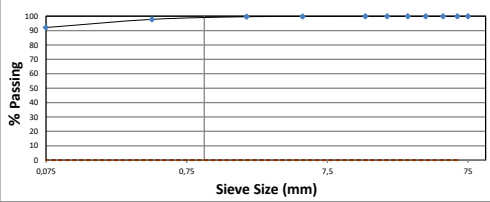
Job No:	TP18124	
Order No:	-	
Sample No:	2379	
Project Information:	Phase 12 & 14 Outeniquasbosch	
Number of pages:	2	
Date Received:	25/01/2023	
Date Sampled:	25/01/2023	
Sampled by:	TESTPRO Laboratory	
Sample plan included:	No	
Environmental Conditions:	Hot /	Sunny /
Delivered by:	TESTPRO Laboratory	
Sampling method:	TMH5:MA2	
Source of sample	Test Pit 3 (Phase 14)	
Condition of sample:	Good	
Conformity statement requested by client:	Yes	
Subcontractor (if any)	No	
Material description:	Olive Grey Sandy Clay	
Tests Requested/Method:	SANS	
	Grading	SANS 3001-GR1
	Atterberg Limits	SANS 3001-GR10 & -GR20
	M.D.D	SANS 3001-GR30 & -GR20
	C.B.R.	SANS 3001-GR40 & -GR20
Date Completed:	31/01/2023	

Notes/Deviations	
-	
-	
-	
-	

Remarks:

1. All tests marked (#) are not included in our schedule of Accreditation.
2. The results reported relate only to the sample tested. Statement of conformity are not made or implied in the report, unless required by the client. Review the results, expanded uncertainty, and specifications to ensure they meet your requirements.
The final decision rule will be the customers risk and not the Laboratory.
The Laboratory does not report a statement of conformity unless it is inherent in the requested specification or standard.
3. This document is the correct record of all measurements made, and may not be reproduced other than with full written approval from the Technical Manager of TESTPRO Laboratory.
4. Measuring equipment is traceable to national standards (Where applicable).
5. Samples will be retained, for a one month period, before disposal.
6. Tests are reported with an approximate 95% level of confidence.
7. Uncertainty of measurement will only be reported if requested by the client.
8. Opinions & Interpretations are not included in our schedule of Accreditation.

Technical Signatory
Jaco van Rensburg

 TESTPRO LABORATORY Materials Testing Laboratory		 sanas Testing Laboratory 10952																																																																												
5 Voorbaai Crescent, Bayview, Hartenbos Tel. : (044) 695 0831		P.O. Box 35, Hartenbos, 6520 e-mail : jaco@testpro.co.za																																																																												
Client:	Zec 4 (Pty) Ltd P.O Box 154 Hartenbos 6520		Date Reported: 02/02/2023	Job nr: TP18124																																																																										
			Specification: COLTO	Order no: -																																																																										
Attention:	Dreyer van Zyl, 0825716279		Project: Phase 12 & 14 Outeniquasbosch																																																																											
SOIL ANALYSIS TEST REPORT																																																																														
SAMPLE INFORMATION			MATERIAL PROPERTIES																																																																											
Material Description	Olive Grey Sandy Clay			GRADING																																																																										
Source	Test Pit 3 (Phase 14)	Position/ Layer	Layer 3	Sieve Size % Passing																																																																										
Date Received	25/01/2023	Date Tested	31/01/2023	75 100																																																																										
Sampling Method	TMH5:MA2	Sample Number	2379	63 100																																																																										
MOD, BD & AD Analysis				50 100																																																																										
MDD	1912	kg/m³	OMC	9,0																																																																										
BD	-		WA	-																																																																										
AD	-			%																																																																										
Method	Scalped	% Scalped	0,0	%																																																																										
Uncertainty																																																																														
MDD		kg/m³	OMC	%																																																																										
																																																																														
																																																																														
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>Size</th> <th>Fractured Faces %</th> <th>Size</th> <th>Fractured Faces %</th> <th rowspan="4">#N/A</th> </tr> <tr> <td>37,5</td> <td></td> <td>14</td> <td></td> </tr> <tr> <td>28</td> <td></td> <td>5</td> <td></td> </tr> <tr> <td>20</td> <td></td> <td>All>5</td> <td></td> </tr> </table>					Size	Fractured Faces %	Size	Fractured Faces %	#N/A	37,5		14		28		5		20		All>5																																																										
Size	Fractured Faces %	Size	Fractured Faces %	#N/A																																																																										
37,5		14																																																																												
28		5																																																																												
20		All>5																																																																												
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>✓</td> <td>In Spec</td> </tr> <tr> <td>✗</td> <td>Out of Spec</td> </tr> <tr> <td>□</td> <td>Even with a 95% certainty, reading could be out of spec.</td> </tr> </table>					✓	In Spec	✗	Out of Spec	□	Even with a 95% certainty, reading could be out of spec.																																																																				
✓	In Spec																																																																													
✗	Out of Spec																																																																													
□	Even with a 95% certainty, reading could be out of spec.																																																																													
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">SIEVE ANALYSIS</td> </tr> <tr> <td colspan="2" style="text-align: center;">  </td> </tr> <tr> <td>Test</td> <td>Results</td> </tr> <tr> <td>Grading Modulus</td> <td>0,1</td> </tr> <tr> <td>Coarse Sand Ratio</td> <td>2</td> </tr> <tr> <td colspan="2" style="text-align: center;">Strength (kN)</td> </tr> <tr> <td>10% FACT (Dry)</td> <td>Mudrock Only</td> </tr> <tr> <td>10% FACT (Wet)</td> <td></td> </tr> <tr> <td>Wet/Dry Rel. (%)</td> <td></td> </tr> <tr> <td colspan="2" style="text-align: center;">CBR</td> </tr> <tr> <td>Moulding MC%</td> <td>9,0</td> </tr> <tr> <td>CBR @ 98%</td> <td>2</td> </tr> <tr> <td>CBR @ 97%</td> <td>2</td> </tr> <tr> <td>CBR @ 95%</td> <td>2</td> </tr> <tr> <td>CBR @ 93%</td> <td>2</td> </tr> <tr> <td>CBR @ 90%</td> <td>1</td> </tr> <tr> <td colspan="2" style="text-align: center;">Swell</td> </tr> <tr> <td>Swell @ 100%</td> <td>6,4</td> </tr> <tr> <td colspan="2" style="text-align: center;">Durability (%)</td> </tr> <tr> <td>ACV (Dry)</td> <td></td> </tr> <tr> <td>ACV (Wet)</td> <td></td> </tr> <tr> <td colspan="2" style="text-align: center;">Flakiness Index</td> </tr> <tr> <td>20mm<28mm</td> <td></td> </tr> <tr> <td>14mm<20mm</td> <td></td> </tr> <tr> <td colspan="2" style="text-align: center;">Atterberg Limits</td> </tr> <tr> <td colspan="2" style="text-align: center;">-0.425mm</td> </tr> <tr> <td>Liquid Limit</td> <td>48</td> </tr> <tr> <td>Plastic Limit</td> <td>21</td> </tr> <tr> <td>Linear Shrinkage</td> <td>11,0</td> </tr> <tr> <td>LSx%Pass0.425</td> <td>1076</td> </tr> <tr> <td>Plasticity index</td> <td>27</td> </tr> <tr> <td colspan="2" style="text-align: center;">-0.075mm</td> </tr> <tr> <td>Liquid Limit</td> <td>-</td> </tr> <tr> <td>Plastic Limit</td> <td>-</td> </tr> <tr> <td>Linear Shrinkage</td> <td>-</td> </tr> <tr> <td>Plasticity index</td> <td>-</td> </tr> <tr> <td>Classification:</td> <td style="text-align: center;"><G9</td> </tr> </table>					SIEVE ANALYSIS				Test	Results	Grading Modulus	0,1	Coarse Sand Ratio	2	Strength (kN)		10% FACT (Dry)	Mudrock Only	10% FACT (Wet)		Wet/Dry Rel. (%)		CBR		Moulding MC%	9,0	CBR @ 98%	2	CBR @ 97%	2	CBR @ 95%	2	CBR @ 93%	2	CBR @ 90%	1	Swell		Swell @ 100%	6,4	Durability (%)		ACV (Dry)		ACV (Wet)		Flakiness Index		20mm<28mm		14mm<20mm		Atterberg Limits		-0.425mm		Liquid Limit	48	Plastic Limit	21	Linear Shrinkage	11,0	LSx%Pass0.425	1076	Plasticity index	27	-0.075mm		Liquid Limit	-	Plastic Limit	-	Linear Shrinkage	-	Plasticity index	-	Classification:	<G9
SIEVE ANALYSIS																																																																														
																																																																														
Test	Results																																																																													
Grading Modulus	0,1																																																																													
Coarse Sand Ratio	2																																																																													
Strength (kN)																																																																														
10% FACT (Dry)	Mudrock Only																																																																													
10% FACT (Wet)																																																																														
Wet/Dry Rel. (%)																																																																														
CBR																																																																														
Moulding MC%	9,0																																																																													
CBR @ 98%	2																																																																													
CBR @ 97%	2																																																																													
CBR @ 95%	2																																																																													
CBR @ 93%	2																																																																													
CBR @ 90%	1																																																																													
Swell																																																																														
Swell @ 100%	6,4																																																																													
Durability (%)																																																																														
ACV (Dry)																																																																														
ACV (Wet)																																																																														
Flakiness Index																																																																														
20mm<28mm																																																																														
14mm<20mm																																																																														
Atterberg Limits																																																																														
-0.425mm																																																																														
Liquid Limit	48																																																																													
Plastic Limit	21																																																																													
Linear Shrinkage	11,0																																																																													
LSx%Pass0.425	1076																																																																													
Plasticity index	27																																																																													
-0.075mm																																																																														
Liquid Limit	-																																																																													
Plastic Limit	-																																																																													
Linear Shrinkage	-																																																																													
Plasticity index	-																																																																													
Classification:	<G9																																																																													
Technical Signatory Jaco van Rensburg																																																																														