



TESTPRO LABORATORY
Materials Testing Laboratory

5 Voorbaai Crescent, Bayview, Hartenbos
Tel.: (044) 695 0831

P.O. Box 35, Hartenbos, 6520
e-mail: jaco@testpro.co.za



Client:	Zec 4 (Pty) Ltd
	P.O Box 154
	Hartenbos
	6520
Attention:	Dreyer van Zyl, 0825716279

SOIL ANALYSIS TEST REPORT

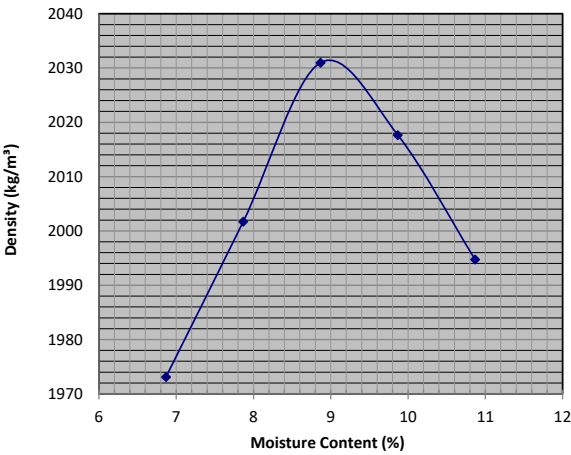
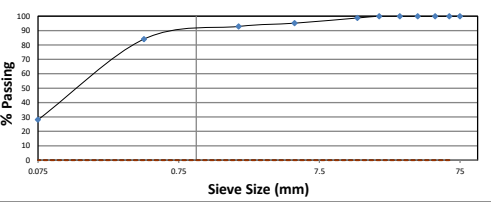
Job No:	TP16924	
Order No:	-	
Sample No:	1676	
Project Information:	Phase 4 Outeniquasbosch	
Number of pages:	2	
Date Received:	04/05/2022	
Date Sampled:	04/05/2022	
Sampled by:	TESTPRO Laboratory	
Sample plan included:	No	
Environmental Conditions:	Hot /	Cloudy /
Delivered by:	TESTPRO Laboratory	
Sampling method:	TMH5:MA2	
Source of sample	Test Pit 3	
Condition of sample:	Good	
Conformity statement requested by client:	Yes	
Subcontractor (if any)	No	
Material description:	Yellowish Petrified Sand	
Tests Requested/Method:	SANS	
	Grading	SANS 3001-GR1
	Atterberg Limits	SANS 3001-GR10 & -GR20
	M.D.D	SANS 3001-GR30 & -GR20
	C.B.R.	SANS 3001-GR40 & -GR20
Date Completed:	24/05/2022	

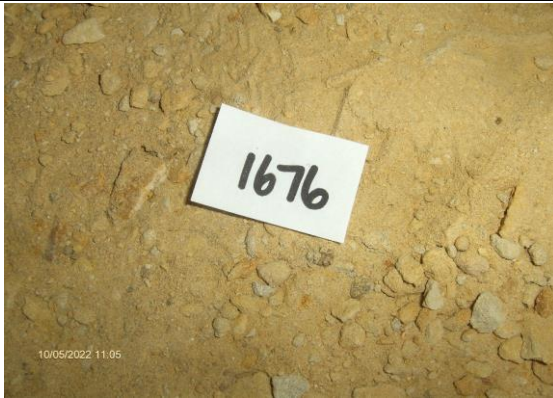
Notes/Deviations

Remarks:

- All tests marked (#) are not included in our schedule of Accreditation.
- The results reported relate only to the sample tested. Statement of conformity are not made or implied in the report, unless required by the client. Review the results, expanded uncertainty, and specifications to ensure they meet your requirements.
The final decision rule will be the customers risk and not the Laboratory.
The Laboratory does not report a statement of conformity unless it is inherent in the requested specification or standard.
- This document is the correct record of all measurements made, and may not be reproduced other than with full written approval from the Technical Manager of TESTPRO Laboratory.
- Measuring equipment is traceable to national standards (Where applicable).
- Samples will be retained, for a one month period, before disposal.
- Tests are reported with an approximate 95% level of confidence.
- Uncertainty of measurement will only be reported if requested by the client.
- Opinions & Interpretations are not included in our schedule of Accreditation.

Technical Signatory
Jaco van Rensburg

 TESTPRO LABORATORY Materials Testing Laboratory		 sanas Testing Laboratory 10552																																																																																																																																															
5 Voorbaai Crescent, Bayview, Hartenbos Tel. : (044) 695 0831		P.O. Box 35, Hartenbos, 6520 e-mail : jaco@testpro.co.za																																																																																																																																															
Client:	Zec 4 (Pty) Ltd P.O Box 154 Hartenbos 6520		Date Reported: 25/05/2022	Job nr: TP16924																																																																																																																																													
			Specification: COLTO	Order no: -																																																																																																																																													
Attention:	Dreyer van Zyl, 0825716279		Project: Phase 4 Outeniquasbosch																																																																																																																																														
SOIL ANALYSIS TEST REPORT																																																																																																																																																	
SAMPLE INFORMATION			MATERIAL PROPERTIES																																																																																																																																														
Material Description	Yellowish Petrified Sand			<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="2">GRADING</th> <th>G8</th> <th>Uncertainty</th> <th>Opinion</th> </tr> <tr> <th>Sieve Size</th> <th>% Passing</th> <th>Specifications</th> <th></th> <th>✓ or X</th> </tr> <tr><td>75</td><td>100</td><td></td><td></td><td></td></tr> <tr><td>63</td><td>100</td><td></td><td></td><td></td></tr> <tr><td>50</td><td>100</td><td></td><td></td><td></td></tr> <tr><td>37.5</td><td>100</td><td></td><td></td><td></td></tr> <tr><td>28</td><td>100</td><td></td><td></td><td></td></tr> <tr><td>20</td><td>100</td><td></td><td></td><td></td></tr> <tr><td>14</td><td>99</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>95</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>93</td><td></td><td></td><td></td></tr> <tr><td>0.425</td><td>84</td><td></td><td></td><td></td></tr> <tr><td>0.075</td><td>28.1</td><td></td><td></td><td></td></tr> </table>	GRADING		G8	Uncertainty	Opinion	Sieve Size	% Passing	Specifications		✓ or X	75	100				63	100				50	100				37.5	100				28	100				20	100				14	99				5	95				2	93				0.425	84				0.075	28.1																																																																															
GRADING		G8	Uncertainty	Opinion																																																																																																																																													
Sieve Size	% Passing	Specifications		✓ or X																																																																																																																																													
75	100																																																																																																																																																
63	100																																																																																																																																																
50	100																																																																																																																																																
37.5	100																																																																																																																																																
28	100																																																																																																																																																
20	100																																																																																																																																																
14	99																																																																																																																																																
5	95																																																																																																																																																
2	93																																																																																																																																																
0.425	84																																																																																																																																																
0.075	28.1																																																																																																																																																
Source	Test Pit 3	Position/ Layer	Layer 3																																																																																																																																														
Date Received	04/05/2022	Date Tested	24/05/2022																																																																																																																																														
Sampling Method	TMH5:MA2	Sample Number	1676																																																																																																																																														
MOD, BD & AD Analysis																																																																																																																																																	
MDD	2031	kg/m³	OMC	9.0																																																																																																																																													
BD	-		WA	-																																																																																																																																													
AD	-			%																																																																																																																																													
Method	Scalped	% Scalped	0.0																																																																																																																																														
Uncertainty																																																																																																																																																	
MDD		kg/m³	OMC	%																																																																																																																																													
																																																																																																																																																	
																																																																																																																																																	
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>Test</th> <th>Results</th> <th>Specifications</th> <th>Opinion</th> </tr> <tr> <td>Grading Modulus</td> <td>0.9</td> <td>0.75<2.7</td> <td>✓</td> </tr> <tr> <td>Coarse Sand Ratio</td> <td>9</td> <td>N/A</td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center; font-weight: bold;">Strength (kN)</td> </tr> <tr> <td>10% FACT (Dry)</td> <td></td> <td>Mudrock Only</td> <td></td> </tr> <tr> <td>10% FACT (Wet)</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Wet/Dry Rel. (%)</td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center; font-weight: bold;">CBR</td> </tr> <tr> <td>Moulding MC%</td> <td>8.9</td> <td></td> <td></td> </tr> <tr> <td>CBR @ 98%</td> <td>22</td> <td></td> <td></td> </tr> <tr> <td>CBR @ 97%</td> <td>20</td> <td></td> <td></td> </tr> <tr> <td>CBR @ 95%</td> <td>16</td> <td></td> <td></td> </tr> <tr> <td>CBR @ 93%</td> <td>13</td> <td>Min 10</td> <td>✓</td> </tr> <tr> <td>CBR @ 90%</td> <td>9</td> <td></td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center; font-weight: bold;">Swell</td> </tr> <tr> <td>Swell @ 100%</td> <td>0.2</td> <td>Max 1.5%</td> <td>✓</td> </tr> <tr> <td colspan="4" style="text-align: center; font-weight: bold;">Durability (%)</td> </tr> <tr> <td>ACV (Dry)</td> <td></td> <td></td> <td></td> </tr> <tr> <td>ACV (Wet)</td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center; font-weight: bold;">Flakiness Index</td> </tr> <tr> <td>20mm<28mm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>14mm<20mm</td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center; font-weight: bold;">Atterberg Limits</td> </tr> <tr> <td colspan="4" style="text-align: center;">-0.425mm</td> </tr> <tr> <td>Liquid Limit</td> <td>-</td> <td></td> <td></td> </tr> <tr> <td>Plastic Limit</td> <td>-</td> <td></td> <td></td> </tr> <tr> <td>Linear Shrinkage</td> <td>1.5</td> <td></td> <td></td> </tr> <tr> <td>LSx%Pass0.425</td> <td>126</td> <td></td> <td></td> </tr> <tr> <td>Plasticity index</td> <td>S/P</td> <td>Max 12.8</td> <td>✓</td> </tr> <tr> <td colspan="4" style="text-align: center;">-0.075mm</td> </tr> <tr> <td>Liquid Limit</td> <td>-</td> <td></td> <td></td> </tr> <tr> <td>Plastic Limit</td> <td>-</td> <td></td> <td></td> </tr> <tr> <td>Linear Shrinkage</td> <td>-</td> <td></td> <td></td> </tr> <tr> <td>Plasticity index</td> <td>-</td> <td></td> <td></td> </tr> <tr> <td>Classification:</td> <td colspan="4" style="text-align: center; font-weight: bold;">G8</td> </tr> </table>					Test	Results	Specifications	Opinion	Grading Modulus	0.9	0.75<2.7	✓	Coarse Sand Ratio	9	N/A		Strength (kN)				10% FACT (Dry)		Mudrock Only		10% FACT (Wet)				Wet/Dry Rel. (%)				CBR				Moulding MC%	8.9			CBR @ 98%	22			CBR @ 97%	20			CBR @ 95%	16			CBR @ 93%	13	Min 10	✓	CBR @ 90%	9			Swell				Swell @ 100%	0.2	Max 1.5%	✓	Durability (%)				ACV (Dry)				ACV (Wet)				Flakiness Index				20mm<28mm				14mm<20mm				Atterberg Limits				-0.425mm				Liquid Limit	-			Plastic Limit	-			Linear Shrinkage	1.5			LSx%Pass0.425	126			Plasticity index	S/P	Max 12.8	✓	-0.075mm				Liquid Limit	-			Plastic Limit	-			Linear Shrinkage	-			Plasticity index	-			Classification:	G8			
Test	Results	Specifications	Opinion																																																																																																																																														
Grading Modulus	0.9	0.75<2.7	✓																																																																																																																																														
Coarse Sand Ratio	9	N/A																																																																																																																																															
Strength (kN)																																																																																																																																																	
10% FACT (Dry)		Mudrock Only																																																																																																																																															
10% FACT (Wet)																																																																																																																																																	
Wet/Dry Rel. (%)																																																																																																																																																	
CBR																																																																																																																																																	
Moulding MC%	8.9																																																																																																																																																
CBR @ 98%	22																																																																																																																																																
CBR @ 97%	20																																																																																																																																																
CBR @ 95%	16																																																																																																																																																
CBR @ 93%	13	Min 10	✓																																																																																																																																														
CBR @ 90%	9																																																																																																																																																
Swell																																																																																																																																																	
Swell @ 100%	0.2	Max 1.5%	✓																																																																																																																																														
Durability (%)																																																																																																																																																	
ACV (Dry)																																																																																																																																																	
ACV (Wet)																																																																																																																																																	
Flakiness Index																																																																																																																																																	
20mm<28mm																																																																																																																																																	
14mm<20mm																																																																																																																																																	
Atterberg Limits																																																																																																																																																	
-0.425mm																																																																																																																																																	
Liquid Limit	-																																																																																																																																																
Plastic Limit	-																																																																																																																																																
Linear Shrinkage	1.5																																																																																																																																																
LSx%Pass0.425	126																																																																																																																																																
Plasticity index	S/P	Max 12.8	✓																																																																																																																																														
-0.075mm																																																																																																																																																	
Liquid Limit	-																																																																																																																																																
Plastic Limit	-																																																																																																																																																
Linear Shrinkage	-																																																																																																																																																
Plasticity index	-																																																																																																																																																
Classification:	G8																																																																																																																																																



Fractured Faces				
Size	Fractured Faces %	Size	Fractured Faces %	#N/A
37.5		14		
28		5		
20		All>5		
		✓	In Spec	
		✗	Out of Spec	
		□	Even with a 95% certainty, reading could be out of spec.	

Technical Signatory
Jaco van Rensburg

End of Report

Page 2 of 2